



This surface-mounted thermostat has been developed to be able to switch electric and conventional heating systems on and off using a set temperature and time.



## Functions

---


- ✓ LCD display can be clearly read with the background lighting.
- ✓ Easy to fit thermostat
- ✓ Three buttons make it easy to use.
- ✓ Non-programmable
- ✓ The display shows the set temperature as well as the measured temperature, time.
- ✓ Temperature display in degrees Celsius.

## Technical Data

---

Thermostat operating voltage:	2 x AAA1.5 V, alkaline batteries.
Backup storage:	EEPROM
Receiver operating voltage:	230 VAC, 50/60 Hz
Maximum load:	0.5A
Receiver switch contacts:	NO and NC.
Temperature settings:	5°C ~ 30°C, 0.5°C increments.
Accuracy:	+/- 0.5°C
Thermostat dimensions:	Surface mounted, 112mm x 86mm x 22.7mm.
Color:	White
IP protection rating:	20.
Certification:	CE.

## Display & Buttons

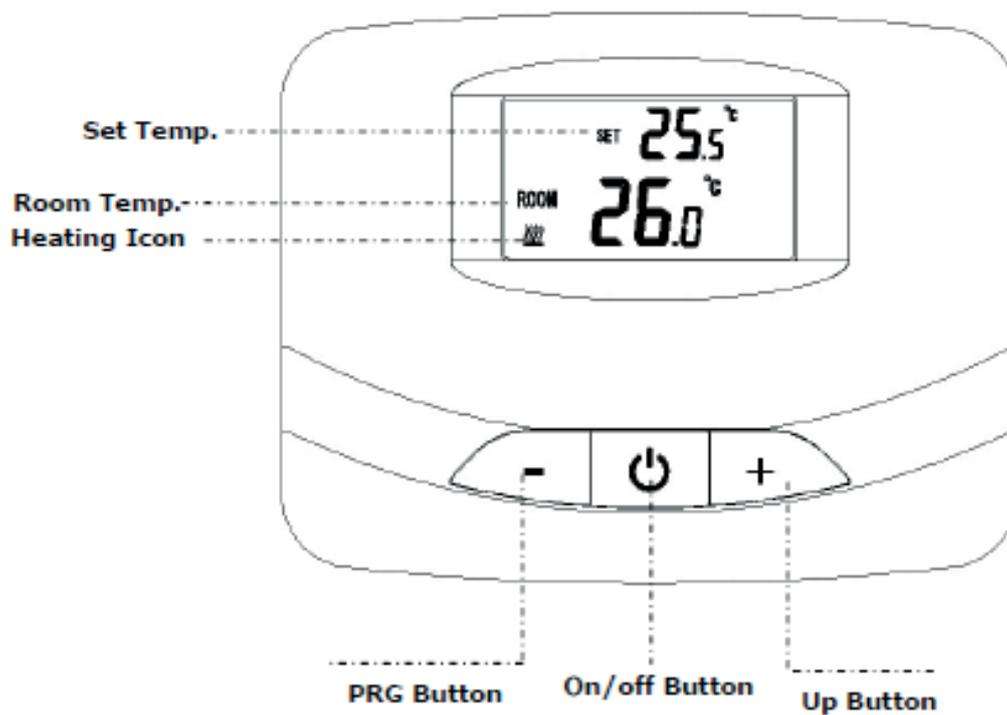


## Temp. Calibration


Turn thermostat off, then press  button for 3 sec. to calibrate Temp. by pressing "+" and "-" buttons.

Range : -8°C ~8°C

## Wiring Diagram

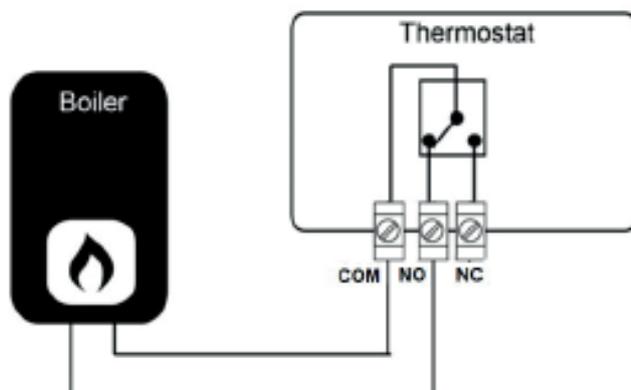


## Dimensions

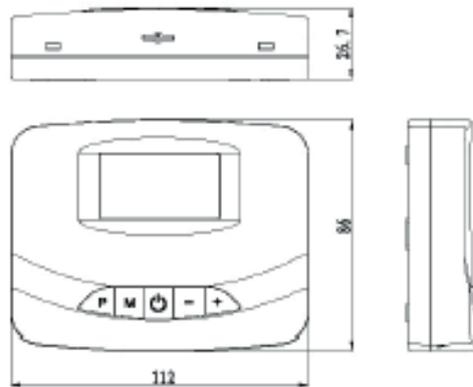


## Installation



Open the thermostat

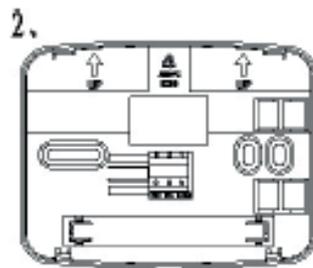

Fix the base on wall with provided screws

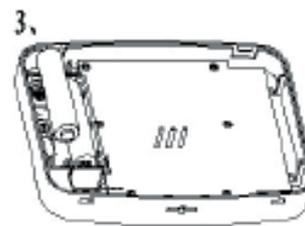

Install Battery



Close the thermostat